

Penewet is a ready-to-use, colorless wetting agent/surfactant solution incorporating advanced concepts in surface chemistry. It provides powerful wetting, penetrating and coalescing of Asbestos Containing Material (ACM) to permit handling and removal of these materials under damp, dust-free conditions. Penewet is a nonflammable, water-based, non-toxic liquid that will not corrode aluminum components of spray equipment.

SURFACE PREPARATION: Warning! If you scrape, sand, or remove old paint from any surface, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH approved respirator to control lead exposure. Carefully clean up with a wet mop or HEPA vacuum. Before you start, find out how to protect yourself and you family by contacting the U.S. EPA/Lead Information Hotline at 1-800-424-LEAD(5323) or log on to www.epa.gov/lead.



Stir **Penewet** thoroughly to achieve a uniform consistency. **Penewet** is pre-mixed; water addition is not necessary.

APPLICATION TOOLS: Apply **Penewet** with an airless or pump sprayer.

APPLICATION: Apply **Penewet** initially at full strength. Wait a few minutes after the first application and re-spray to ensure adequate penetration and saturation of ACM. After determining the proper rate of spray that is effective for the removal of the ACM, and documenting acceptable fiber count levels. Air monitoring results will determine the suitability of this procedure.

CLEANUP: Tools and drippings should be cleaned with warm soapy water. Follow equipment manufacturer's directions to clean spray equipment. Dispose of all waste according to current Local, State and Federal regulations.

COVERAGE: Depending on thickness and porosity of the material, should not be less than 500 sq. ft./gal.

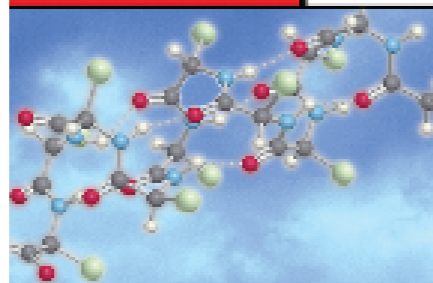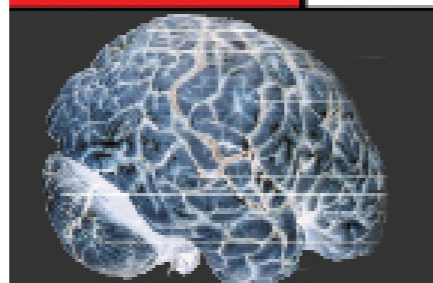

QUALITY

KNOWLEDGE

SCIENCE

FIBERLOCK
TECHNOLOGIES

**PENE
WET®**

Asbestos Abatement Products

**WETTING AGENT
& SURFACTANT**

For the Removal of Asbestos Containing Materials

PRECAUTIONS: Close container after each use. Store in a dry place at temperatures between 40°F and 100°F. Approved respirators must be used to prevent inhalation of asbestos fibers that may be present in the air. Protective clothing should be worn.

Careful consideration should be given to all EPA, OSHA, and State regulations in effect at the time of application of Penewet. The EPA, through the Office of Pesticides and Toxic Substances, has issued a report headed "Guidance for Controlling Friable Asbestos Containing Materials in Buildings", EPA 560/5 85-024 June 1985, containing the proper data, cautions and procedures for asbestos control. Copies are available from: TSCA Industry Asst. Office, EPA TS-799, 401 M Street SW, Washington, DC 20460, (202) 554-1404.

CAS NO.	Chemical Ingredients
7732-18-5	Water
68131-39-5	Alcohol ethoxylate
64-02-8	Tetrasodium EDTA
Not avail.*	Alkoxyated linear alcohol
Not avail.*	Hydroxyethyl cellulose
	*Contents partially unknown

CAUTION!

KEEP OUT OF REACH OF CHILDREN.

Do not take internally. Close container after each use. Keep from freezing.
24 hour Emergency "CHEM-TEL" Phone: 1-800-255-3924

DISCLAIMER: These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of this product are beyond our control. Neither Fiberlock Technologies, Inc., nor its agents shall be responsible for the use of this product or any procedures or apparatus mentioned. We recommend that the prospective user determine the suitability of Penewet for each specific project and for the health and safety of personnel working in the area.

For additional information and/or precautions check Material Safety Data Sheet (MSDS) or Product Data Sheet (PDS) available online at www.fiberlock.com

FOR PROFESSIONAL USE ONLY
5 U.S. Gallons(18.925 Liters) Net

6450

www.fiberlock.com

MADE IN THE USA

Manufactured by:
Fiberlock Technologies, Inc.
Andover, MA 01810
(800) 342-3755
www.fiberlock.com